

Gates & Guidance

CentroGate and Screen walls



Catalogue 2026

CentroGate

A smart, strong and adaptable checkout solution

The CentroGate is an automatic gate designed for entrance and exit areas, offering a wide range of gate arm options. It provides significant benefits for stores by saving floor space, as it can be integrated with screen walls and railings.



► Effortless flow, maximum space – secure and flexible for any store

Our customers using CentroGate

ICA

coop

Dagrofa

KIWI minipris

XXL

TOKMANNI

REMA 1000

MENY

Key features and benefits

- Opening by photocell, radar, and external control.
- Wide range of tube gate arms.
- Automatic return as standard.
- Possible to integrate into screen walls.
- Various heights of screen wall sections.
- Painted in RAL colours.

Technical specification



<i>Dimensions</i>	Length: 230 mm Width: 170-215 mm Height: 1 050-2 400 mm
<i>Weight</i>	24-40 kg + gate arm
<i>Certifications</i>	CE
<i>Voltage</i>	230 VAC, 50-60 Hz
<i>Operating temperature</i>	Intrack
<i>Gate arm options</i>	Yes
<i>Opening angle</i>	180 °
<i>Synchronized opening</i>	Yes
<i>Panic alarm</i>	Optional
<i>Options</i>	Remote control, overhead sensor, service desk switch, RFID reader
<i>Customisable</i>	Yes
<i>Installation</i>	Indoor
<i>Operating conditions</i>	Indoor

CentroGate

Single and double gates
with standard gate arms




Single, saloon
and back to back

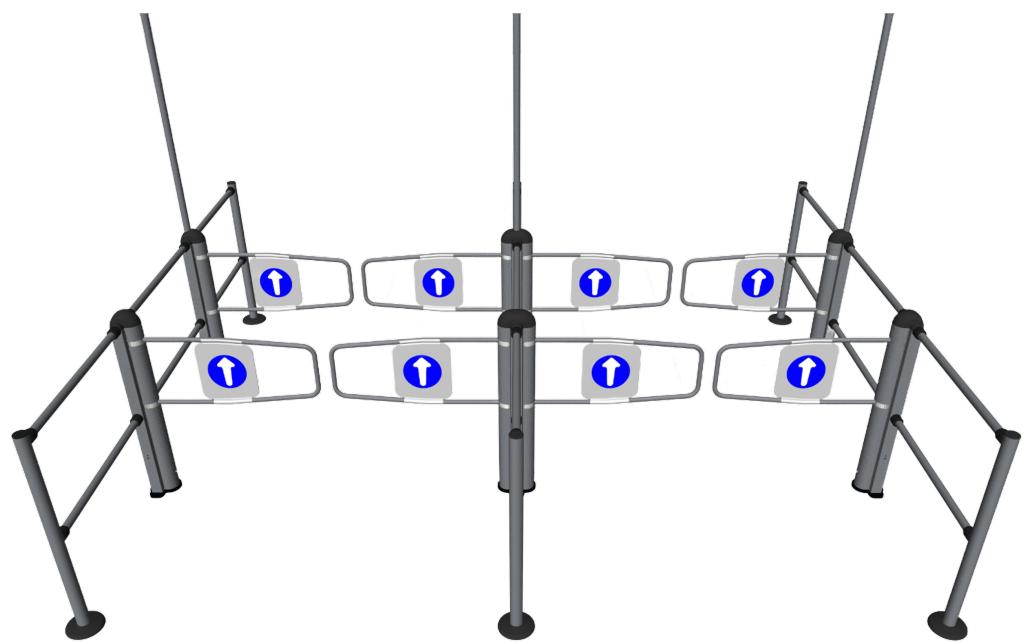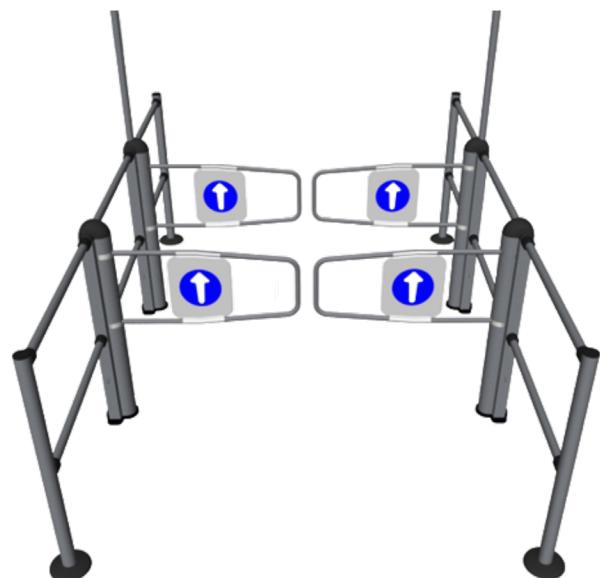

CentroGate

Wide range of
gate arms with LED glass

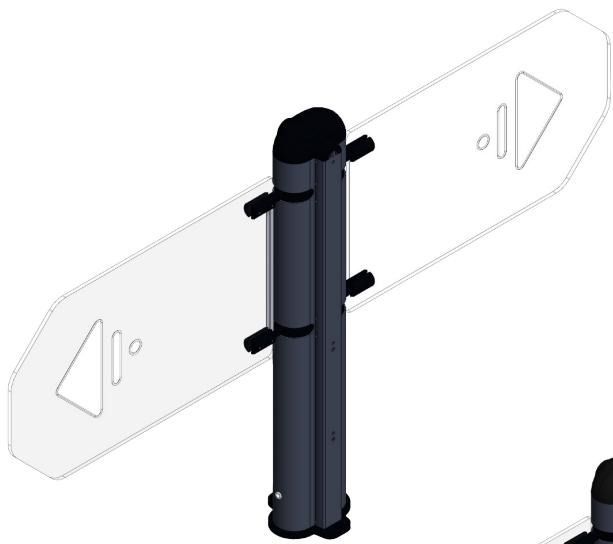




Barcode reader

For exits in self-checkout areas

Our barcode unit offers a simple and reliable way to verify receipts and manage access. With quick scanning, broad compatibility, and flexible setup, it delivers efficiency both for staff and customers.

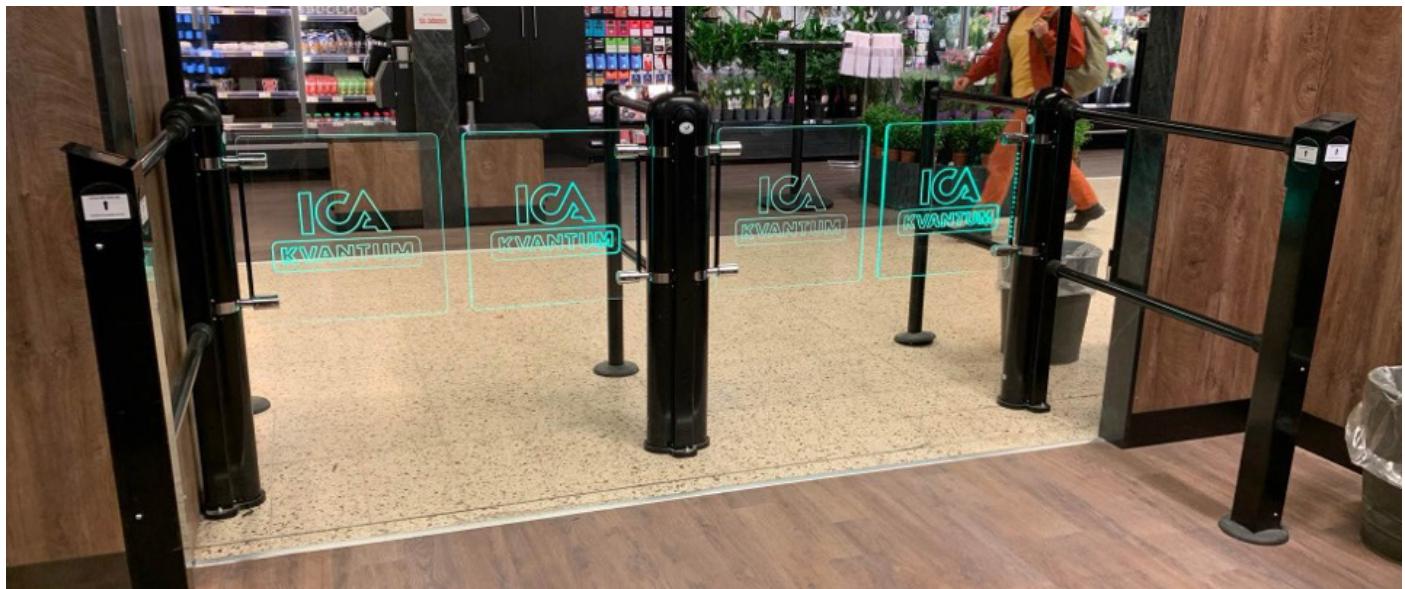

Key features and benefits

- Works stand-alone – no POS connection needed
- Fast verification of receipts via barcode or QR code
- Reads both printed receipts and barcodes from mobile screens
- Adjustable receipt validity after scanning
- Proven solution – installed at many retailers in the Nordic countries

Technical specification

Dimensions	Length: 100 mm Width: 1 115 mm Height: 100 mm
Weight	9,5 kg
Certifications	CE
Voltage	24 V
Operating temperature	0–50 °C
IP	20
LED Light	Optional
Operating conditions	Indoor
Scanners	Yes
POS connection	No

With standard gate arms



With LED gate arms




Screen walls

Define spaces, enhance flow

With durable glass and metal panels, Checkmark's screen walls help you guide customers, divide areas and optimize your store layout. A modular system that adapts to your space and style.


Glass and steel sections are available in several models and height alternatives, giving you a modular system that adapts to your space and style.

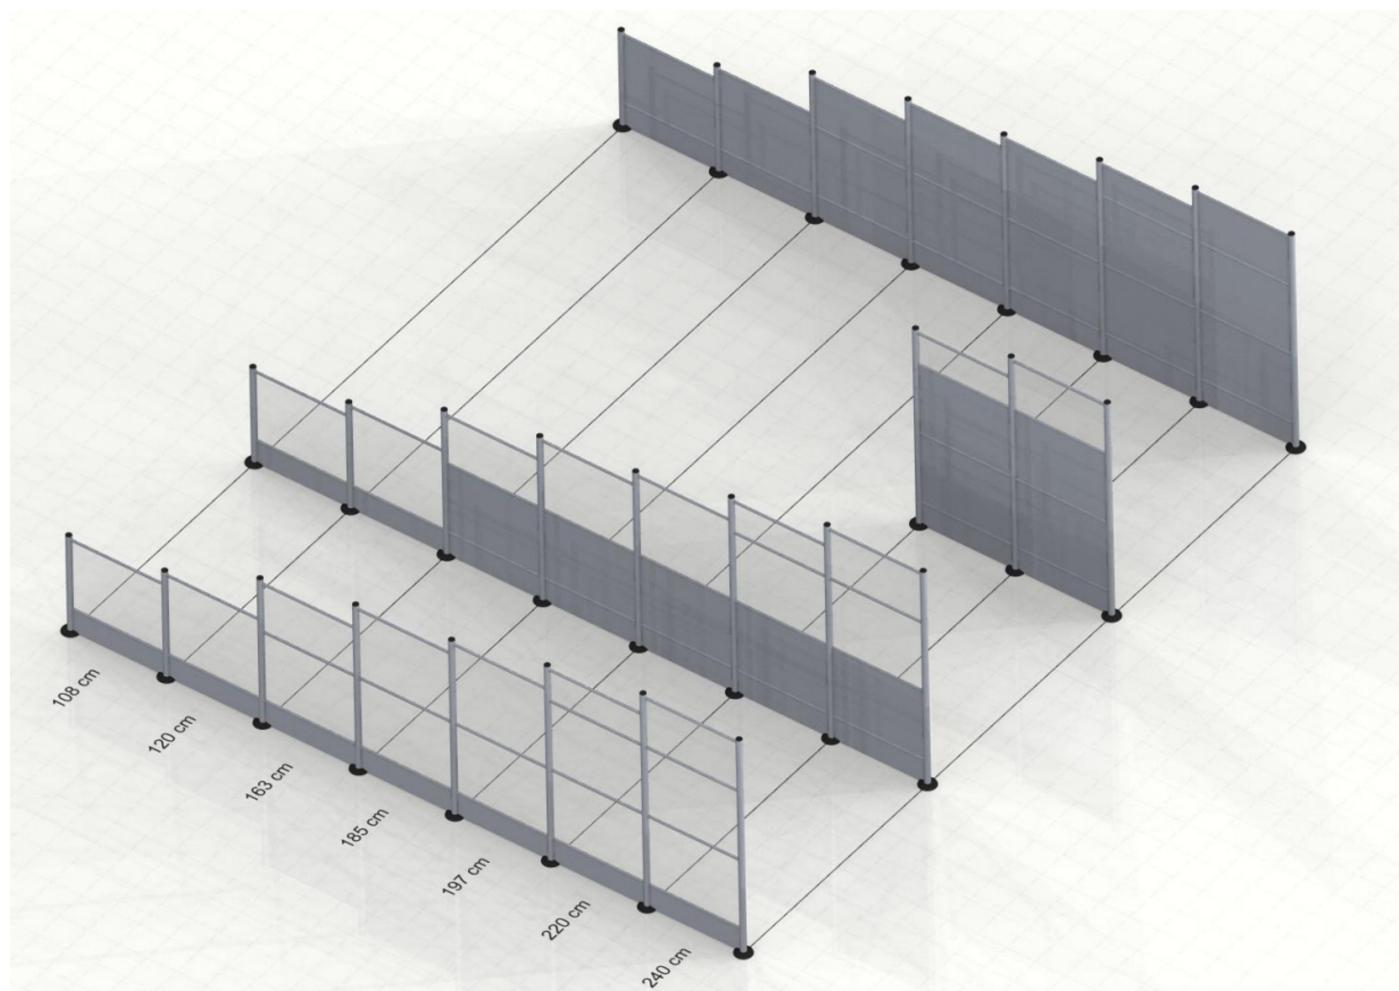





Scan the QR code to visit our website, where you can learn more about our offering.



Oy Checkmark Ltd
Hallipussi 5
761 00 Pieksämäki
FINLAND

Contact
Tele: +358 20 123 0700
Mail: checkmark@checkmark.fi
Website: www.checkmark.fi